

EQC

Euro Quality Cladding


SEAMLAP®

Standing Seam Metal Roof Solution


PRODUCT INFORMATION

Seamlap® is a standing-seam roof and cladding sheet where the sheets click together to deliver an attractive visual finish with hidden fixings.

Suitable for low-pitch (5° minimum) and cold-roof application, Seamlap® sheeting must be supported on either 18mm plywood or OSB deck, overlaid with suitable breather membrane.

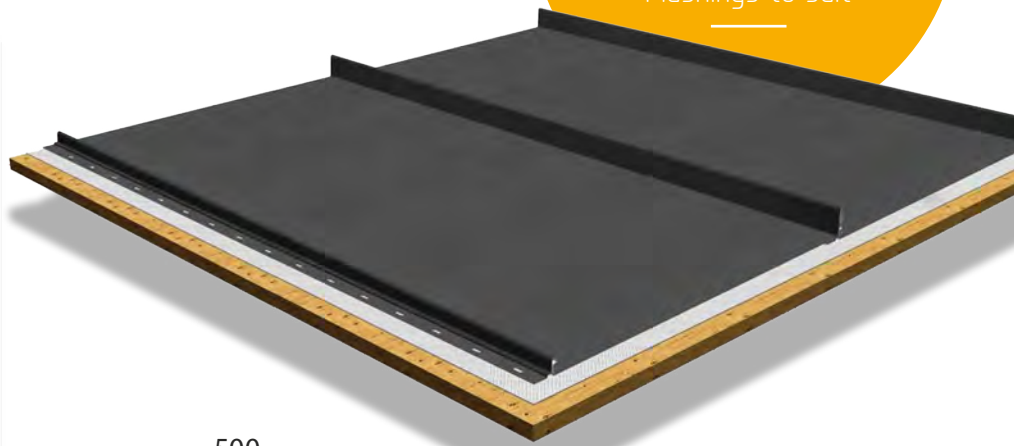


PROFILE

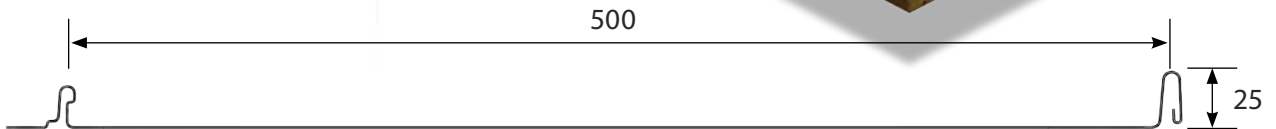


INSTALLATION PROCEDURE

The underlap edge of the sheet is fixed to the timber substrate through the pre-punched strip using stainless steel screws.

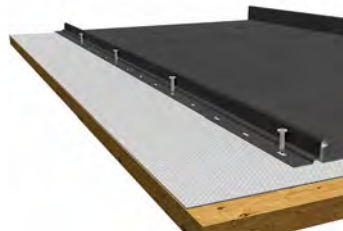

The overlap of the subsequent sheet clicks into place, and forms the side-lap joint.

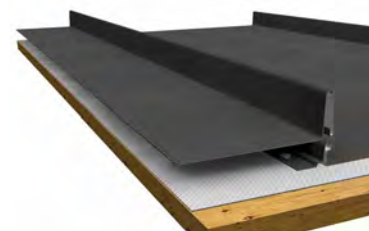

PRODUCT PARAMETERS

MANUFACTURING

Maximum length	10 metres
Minimum length	1 metre
Curving	Not suitable

MATERIALS: TATA COLORCOAT® 0.7MM STEEL

Colorcoat Prisma®	500mm cover width
Colorcoat® LG	500mm cover width

Cover widths from 200mm up to 500mm can be manufactured based on the application and priced accordingly.



INSTALLATION

Ridge and verge details	Contact EQC
Screw fixing	Stainless steel
Fixing frequency	Every 3rd slot (180mm) or five per linear metre

COLOUR FINISH

Colorcoat Prisma®	Anthracite, Slate grey
Colorcoat® LG	Merlin Grey, Goosewing Grey, Raven, Anthracite